


type number	A (mm)	thickness of metal sheet (mm)	weight (kg/pc)
<b>NPR 125_S</b>	148	2,0	0,17
<b>NPR 125_F</b>			0,2
<b>NPR 250_S</b>	273	2,0	0,35
<b>NPR 250_F</b>			0,4
<b>NPR 500_S</b>	523	2,0	0,69
<b>NPR 500_F</b>			0,8

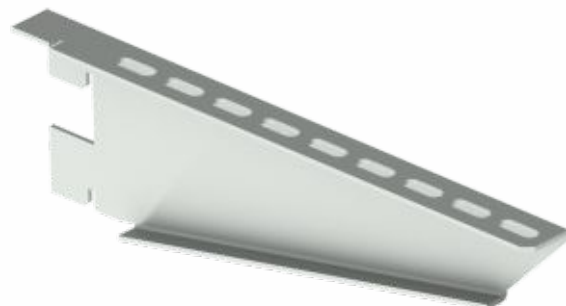

product description:


This clamp support is used as part of a supporting structure for cable trays.

Is designed to be mounted on the NMP assembly profile. The holder must be secured with an NPPVZ catch.

Cable tray attaching to the wall support is carried out by bolts NSM 6X10. To protect the cables, the bolt head is inside the cable tray

A bolt with a GMT surface finish is used for a tray with an F surface finish.

These items can also be ordered in varnished version.

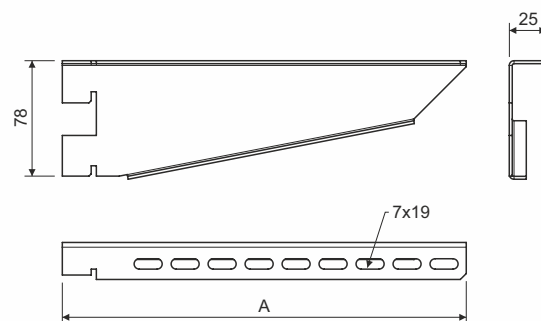

surface finish:

S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm

F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45

µm (min. 35 µm)

meets the requirements: ČSN EN 61537:02

sales amount: 1 pc

storage: ČSN EN 60721-3-1

